

Power Tower



Ultra-Portable Aerial Work Platform

Power Tower features:

- Safe, practical aerial work platform
- Fully enclosed personnel basket
- Reaches work heights up to 26'
- 4 swivel castors allow for 360° turning radius
- Ultra portable - less than 310 lbs
- Quick, one-person loading and unloading
- Fits through 30" doorways







1. Our drill-drive technology includes a gearbox with brake and overload clutch for added safety.
2. Adding, removing and stowing mast sections takes only seconds. Mast sections are conveniently stowed alongside the platform. Dual access basket allows entry and exit from two sides. The platform easily removes for transportation.
3. Specially designed coupler system allows for quick and easy attachment of sections. Lock levers prohibit the advancement of the platform unless they are securely locked in place.
4. Transport the Power Tower with any vehicle equipped with a 2" receiver hitch. Load and unload in under 15 seconds. No ropes, chains or straps required.
5. Flat free transport tires make for easy transport across rugged or smooth terrain.
6. Four non-marking, locking castor wheels make maneuvering the Power Tower easy.
7. Easy, adjustable outrigger pads fit in tight spaces and are gentle on floors.

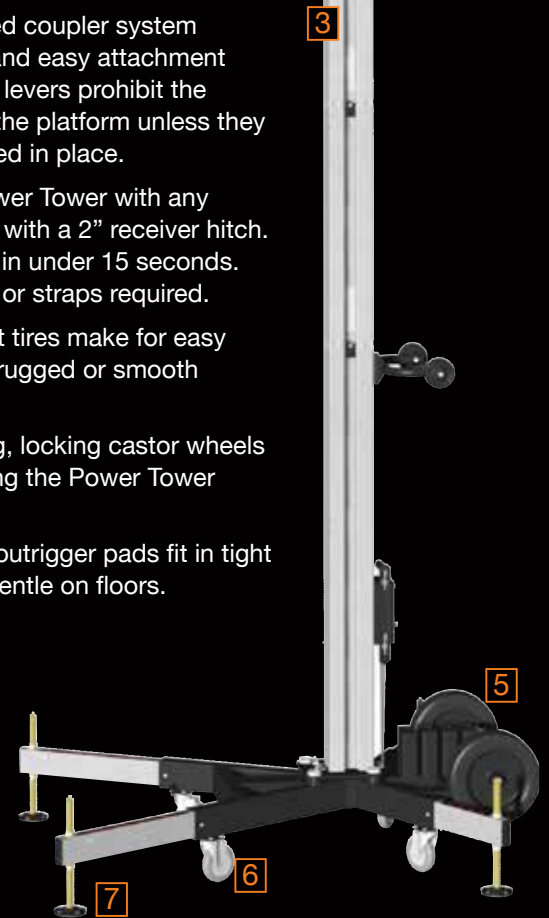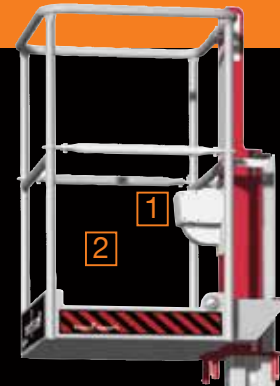

	ANSI A92.3	CSA B354.1-11	ANSI A92.4	CSA B354.1-04
Specifications	M20	M20C	PL60	PL60C
Platform Capacity	350 lbs (159 kg)	350 lbs (1 Person + Payload)	350 lbs (159 kg)	350 lbs (159 kg)
Wind Rating		0 m/s (Indoor Use)		0 m/s (Indoor Use)
Power Source	AC or DC Drill	AC or DC Drill	AC or DC Drill	AC or DC Drill
Rated Horizontal Force	52.5 lbs (234 N)	52.5 lbs (234 N)	52.5 lbs (234 N)	52.5 lbs (234 N)
Machine Weight	278 lbs (126 kg)	278 lbs (126 kg)	310 lbs (141 kg)	310 lbs (141 kg)
Swivel/Lockable Caster Diameter	5 in (127 mm)	5 in (127 mm)	5 in (127 mm)	5 in (127 mm)
Platform Size (L x W)	26 in x 30 in (660 mm x 762 mm)	26 in x 30 in (660 mm x 762 mm)	26 in x 30 in (660 mm x 762 mm)	26 in x 30 in (660 mm x 762 mm)
Mast Section Weight	20.7 lbs (9.4 kg)	20.7 lbs (9.4 kg)	28.5 lbs (12.9 kg)	28.5 lbs (12.9 kg)
Rear Outrigger Weight	7.8 lbs (3.6 kg)	7.8 lbs (3.6 kg)	9.3 lbs (4.2 kg)	9.3 lbs (4.2 kg)
Front Outrigger Weight	10.3 lbs (4.7 kg)	10.3 lbs (4.7 kg)	10.6 lbs (4.8 kg)	10.6 lbs (4.8 kg)
Flat Free Transport Wheels	12 in x 3.5 in (305 mm x 89 mm)	12 in x 3.5 in (305 mm x 89 mm)	12 in x 3.5 in (305 mm x 89 mm)	12 in x 3.5 in (305 mm x 89 mm)
Drive	Worm Drive with Integrated Drive Gear & Brake		Worm Drive with Integrated Drive Gear & Brake	
A Stowed Length	53 in (1346 mm)	53 in (1346 mm)	53.4 in (1356 mm)	53.4 in (1356 mm)
B Stowed Width	30 in (762 mm)	30 in (762 mm)	30 in (762 mm)	30 in (762 mm)
C Stowed Height	56.6 in (1741 mm)	56.6 in (1741 mm)	56.6 in (1741 mm)	56.6 in (1741 mm)
D Minimum Platform Height	12.9 in (329 mm)	12.9 in (329 mm)	12.9 in (329 mm)	12.9 in (329 mm)
E Outrigger Footprint Width	52.1 in (1324 mm)	52.1 in (1324 mm)	67.1 in (1705 mm)	67.1 in (1705 mm)
F Outrigger Footprint Length	58.9 (1496 mm)	58.9 (1496 mm) 1683 mm	64.4 (1635 mm)	64.4 (1635 mm)
G Distance from Wall Side	11 in (281 mm)	11 in (281 mm)	18.5 in (471 mm)	18.5 in (471 mm)
H Distance from Wall Front	12.3 in (314 mm)	12.3 in (314 mm)	10.3 in (261 mm)	10.3 in (261 mm)
I Erected Mast Height	16.3 ft (5.0 m)	16.3 ft (5.0 m)	21.7 ft (6.60 m)	21.7 ft (6.60 m)
J Maximum Platform Height	14.3 ft (4.34 m)	14.3 ft (4.34 m)	19.5 ft (5.94 m)	19.5 ft (5.94 m)
Maximum Working Height*	20.3 ft (6.19 m)	20.3 ft (6.19 m)	25.5 ft (7.77 m)	25.5 ft (7.77 m)

* Maximum Platform Plus 2m

PowerTower

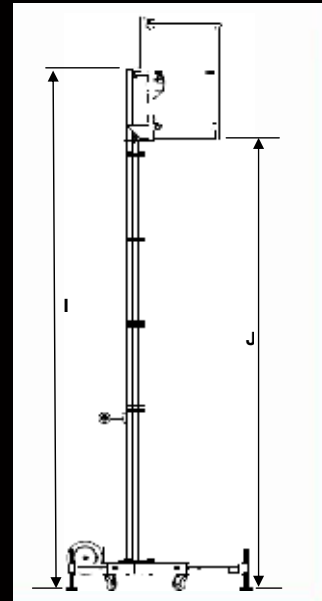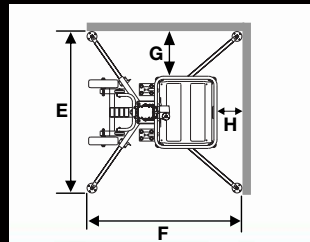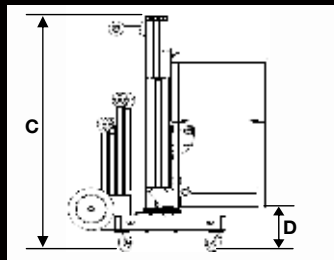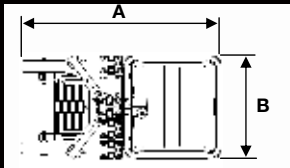

MORE SAFETY SOLUTIONS:



Toll-Free Phone: 1-866-828-6737
Toll-Free Fax: 1-844-899-0088
ironguardsafety.com info@ironguardsafety.com

Many IronGuard Safety Products are trademarked and covered by U.S. or international patents. Products may change without prior notice.

Form [PowerTower EN-HI-IG-L-201603]